

Material:

△ * Insulation: Nylon 6T UL 94V-0

* Contact: Phosphor Bronze

Ordering Code:

CB33 ** 2 R 1 00
① ② ③ ④ ⑤ ⑥

① Series No.

② NO. of Circuits:




③ Plating code:

2= Gold flash plated over
1.27μm(50μ") Nickel

④ Tail Style: R= Bottoma entry

⑤ Color: 1= Black

⑥ Other options: 00= Standard

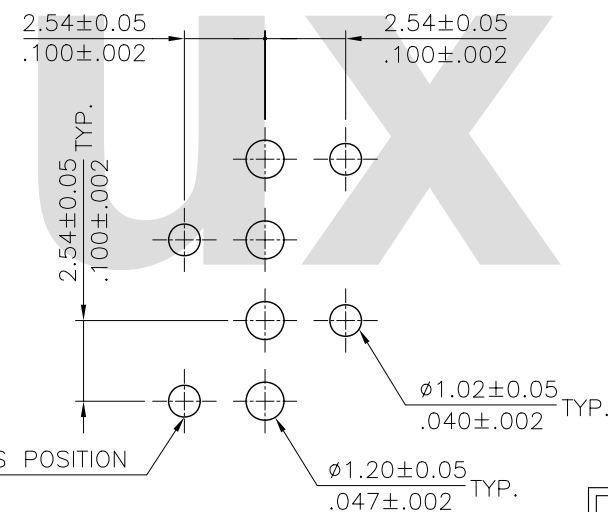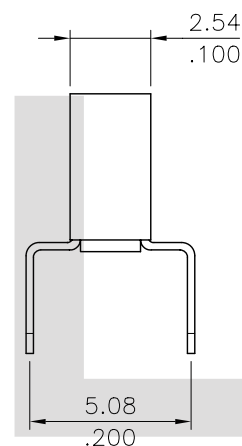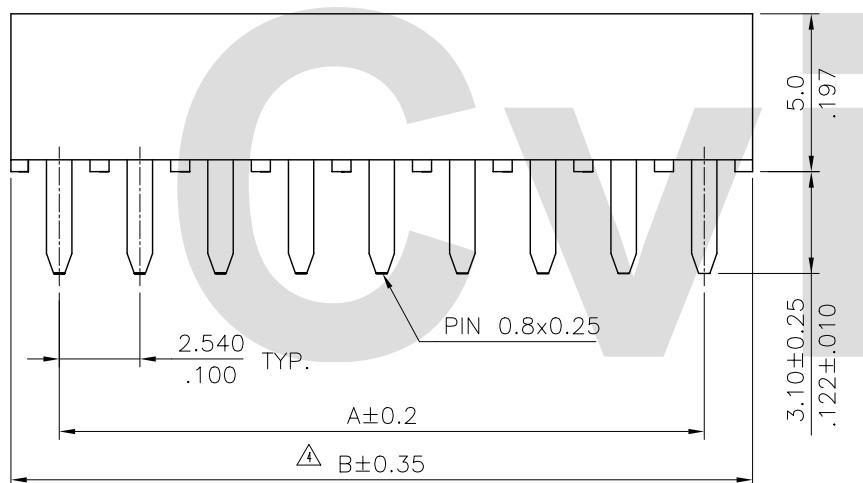

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

A = 2.54 * No. of Spaces

△△ B = A + 3.14

* Available in 2 through 40 circuits

△5	Karen	10/15-08	ECR08083-0/ECN08516	CVILUX.XORP 2008.10.28 ISSUED			DATE	UNIT: mm / inch	TITLE: 2.54MM(.100")	 瀚荃股份有限公司 CviLux Corporation					
△4	Karen	9/19/08	ECR08078-0/ECN08459		DRAWN BY:	Karen	10/23-08	TOLERANCE UNLESS OTHERWISE SPECIFIED			SINGLE ROW BOTTOM ENTRY CONNECTOR				
△3	Sandy	12/19/05	ECN05440		ENGINEER:	Eisley	10/23-08								
△2	Sandy	11/28/05	ECR05110-0/ECN05383		CHECKED BY:	David	10/23-08								
SYM	NAME	DATE	REVISIONS		APPROVED BY:	Alex	10/23-08	.X ± 0.30 / .012 X' ± 1"			MATERIAL:				
							.XX ± 0.20 / .008 X" ±		FINISH:						
							.XXX ± 0.10 / .004 XX' ±				DRAWING NO.	CB3301SG	PART NO.	CB33**2R100	
										SCALE	4 / 1	SHEET	1	OF	1