
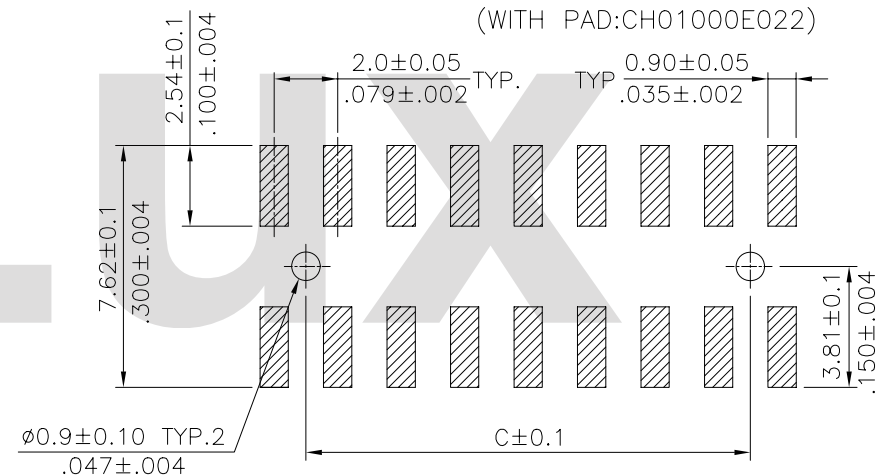
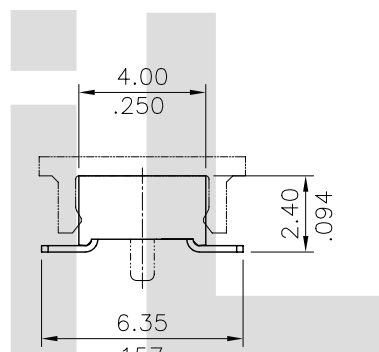
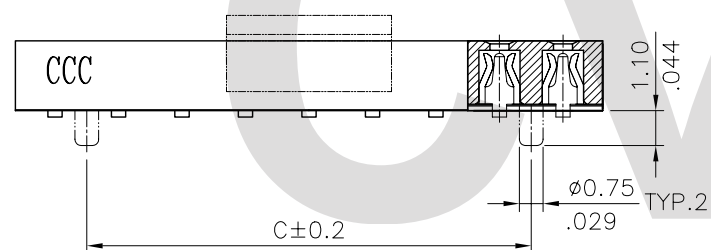


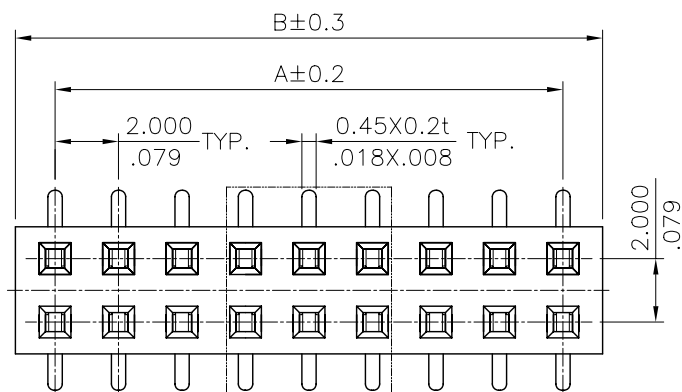

Recommended P.C. Board Layout

A = 2.00 * No. of Spaces

B = A + 2.5

C = A - 2.0

- * Insulation: High temperature plastic
UL 94V-0
- * Contact: Phosphor Bronze

Ordering Code:

CB76 ** * M 1 * *
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② NO. of Circuits: 04 To 80
- ③ Plating code:
2= Gold flash plated over 50μ" Nickel
- ④ Tail Style: M= SMT Type
- ⑤ Color: 1= Black
- ⑥ Option: 0= With Peg
1= Without Peg
- ⑦ Other Options: 0= Standard(Tube Packing)
R= Tape & Reel
(WITH PAD:CH01000E022)

Lead Free Process

RoHS Compliant

4			CIVILUX CORP 2007.05.10 ISSUED			DATE	UNIT: mm / inch		TITLE: 2.00MM(.079") DUAL ROW BOARD MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
3				DRAWN BY:	Clark	5/2/07'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2				ENGINEER:	Eisley	5/2/07'			.X ± 0.30 / .012	X" ± 1"	MATERIAL:		
1				CHECKED BY:	David	5/2/07'	.XX ± 0.20 / .008	.X" ±				FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	5/2/07'	.XXX ± 0.10 / .004	.XX" ±		DRAWING NO.	CB7601SA		PART NO.
										SCALE	4 / 1	SHEET	1 OF 1

