

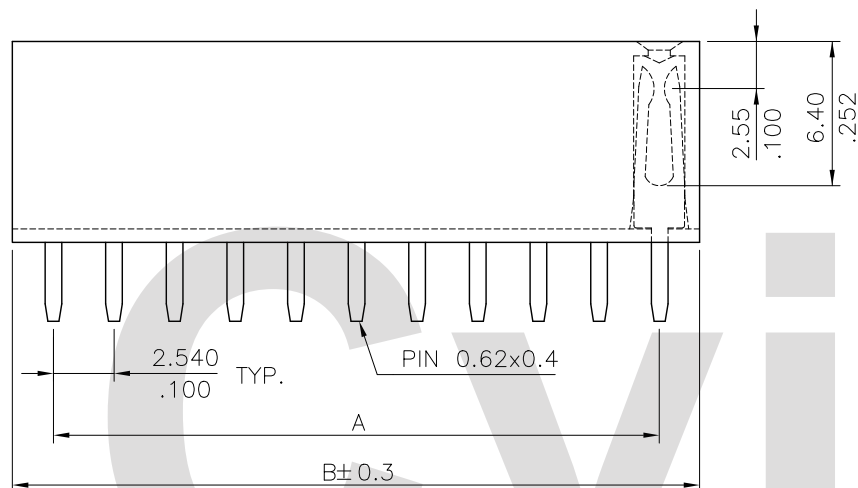


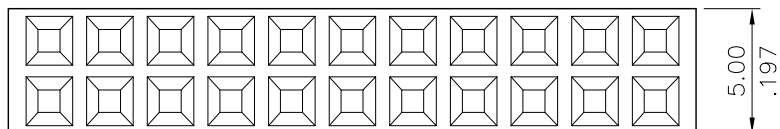

A = 2.54 * No. of Spaces

B = A + 3.0

④ * Available in 4~50, 60, 64 & 80 circuits

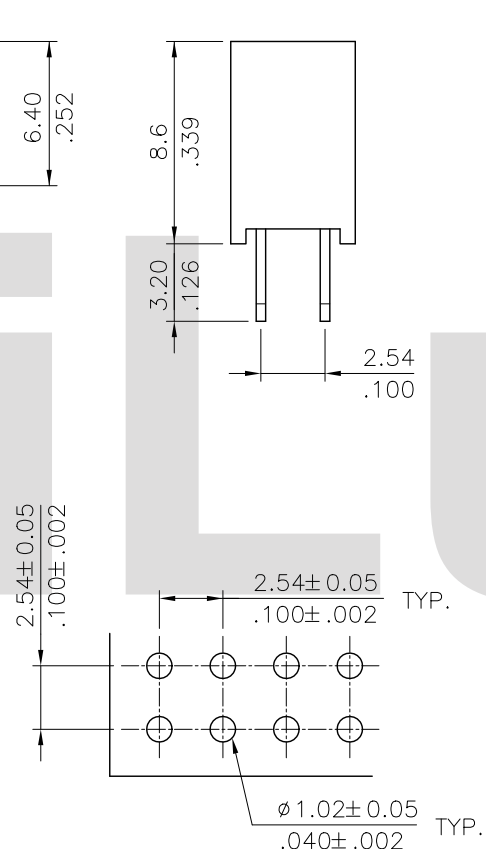

Material:

△△ * Insulation: PBT With 15% G.F. UL 94V-0

* Contact: Brass

Ordering Code:

CB91 ** 2 V 1 00
① ② ③ ④ ⑤ ⑥

① Series No.

② NO. of Circuits:

③ Plating code:

2= Gold flash plated over

1.27μm(50μ") Nickel

④ Tail Style: V= Straight

⑤ Color: 1= Black

⑥ Other options: 00= Standard

DIM.A TOLERANCE	
4P~ 38P	±0.20
40P~ 50,60,64 & 80P	±0.35

Recommended P.C. Board Layout

RoHS Compliant

④	Karen	10/21-11'	ECN11244/ECR11083-0	CVILUX CORP 2011.10.28 ISSUED	DRAWN BY:	Karen	10/21-11'	UNIT: mm / inch	TITLE: 2.54MM(.100") DUAL ROW BOARD MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation					
③	Sun	1/22-07'	ECN07036		ENGINEER:	Eisley	10/24-11'	TOLERANCE UNLESS OTHERWISE SPECIFIED			MATERIAL:				
②	HANK	4/24-06'	ECN06141/ECR0634-0		CHECKED BY:	Eisley	10/24-11'	.X ± 0.30/.012 X' ± 1"	FINISH:						
①	Sun	6/01-05'	ECR05051-0/ECN05196		APPROVED BY:	David	10/24-11'	.XX ± 0.20/.008 .X' ±			DRAWING NO.	CB9101SJ	PART NO.	CB91**2V100	
SYM	NAME	DATE	REVISIONS					.XXX ± 0.10/.004 .XX' ±		SCALE	3 / 1	SHEET	1	OF	1