
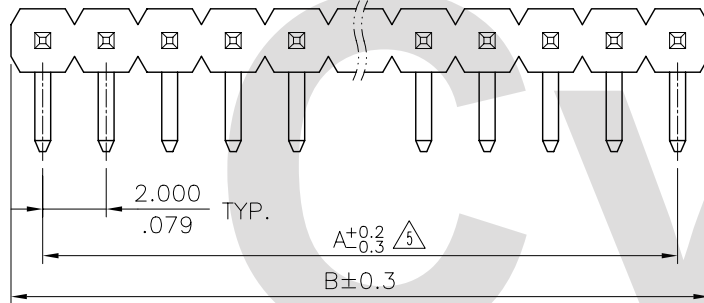


Notes:

* Material:

Contact: Brass


△ * Pin overall Length 30.0mm Max.

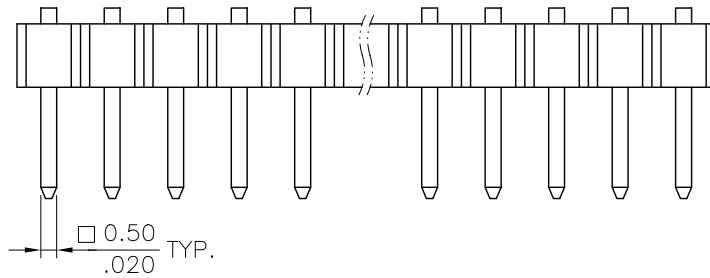

A = 2.0 * No. of Spaces

B = A + 2.0

* Available in 2 through 40 circuits

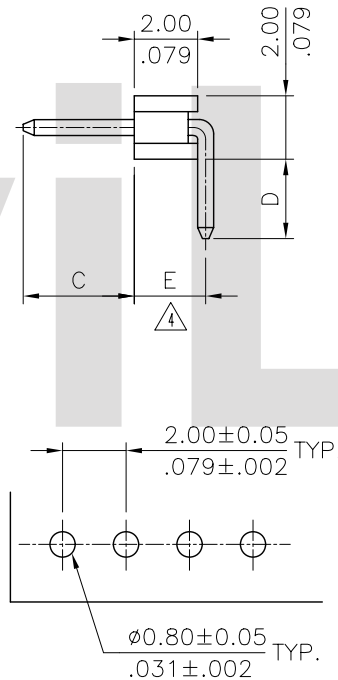

Ordering Code

CH11 ** * H * **
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

③ Plating Code:

1= 3.05 μm (120 μ "") Min. Tin
over 0.76 μm (30 μ "") Nickel

2= Gold flash plated
over 1.27 μm (50 μ "") Nickel

3= 0.38 μm (15 μ "") Gold plated over
1.27 μm (50 μ "") Nickel

4= 0.76 μm (30 μ "") Gold plated over
1.27 μm (50 μ "") Nickel

④ H= Right angle

⑤ Insulation: 1= PBT UL 94V-0, Color Black
A= Nylon 6T UL 94V-0, Color Black

⑥ Pin Length Option cord:

See Table PDF. File No. CH1103T



Recommended P.C. Board Layout

RoHS Compliant

6	Sun	10/6-08'	ECN08478/ECR08118-1			DATE	UNIT: mm / inch		TITLE: 2.00MM(.079") RIGHT ANGLE SINGLE ROW BORAD MOUNT PIN HEADER	 瀚荃股份有限公司 CviLux Corporation			
5	Sandy	1/31-08'	ECN08055/ECR08011-1	DRAWN BY:	Sun	10/07-08'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
4	Sun	12/04-06'	ECN06405	ENGINEER:	Eisley	10/07-08'	.X ± 0.30 / .012 X" ± 1"		MATERIAL:	DRAWING NO.	CH1102SH	PART NO.	CH11***H***
3	Jim	3/14-06'	ECN06084	CHECKED BY:	Alex	10/07-08'	.XX ± 0.20 / .008 X" ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/07-08'	.XXX ± 0.10 / .004 .XX" ±		FINISH:	SCALE	4 / 1	SHEET	1 OF 1