


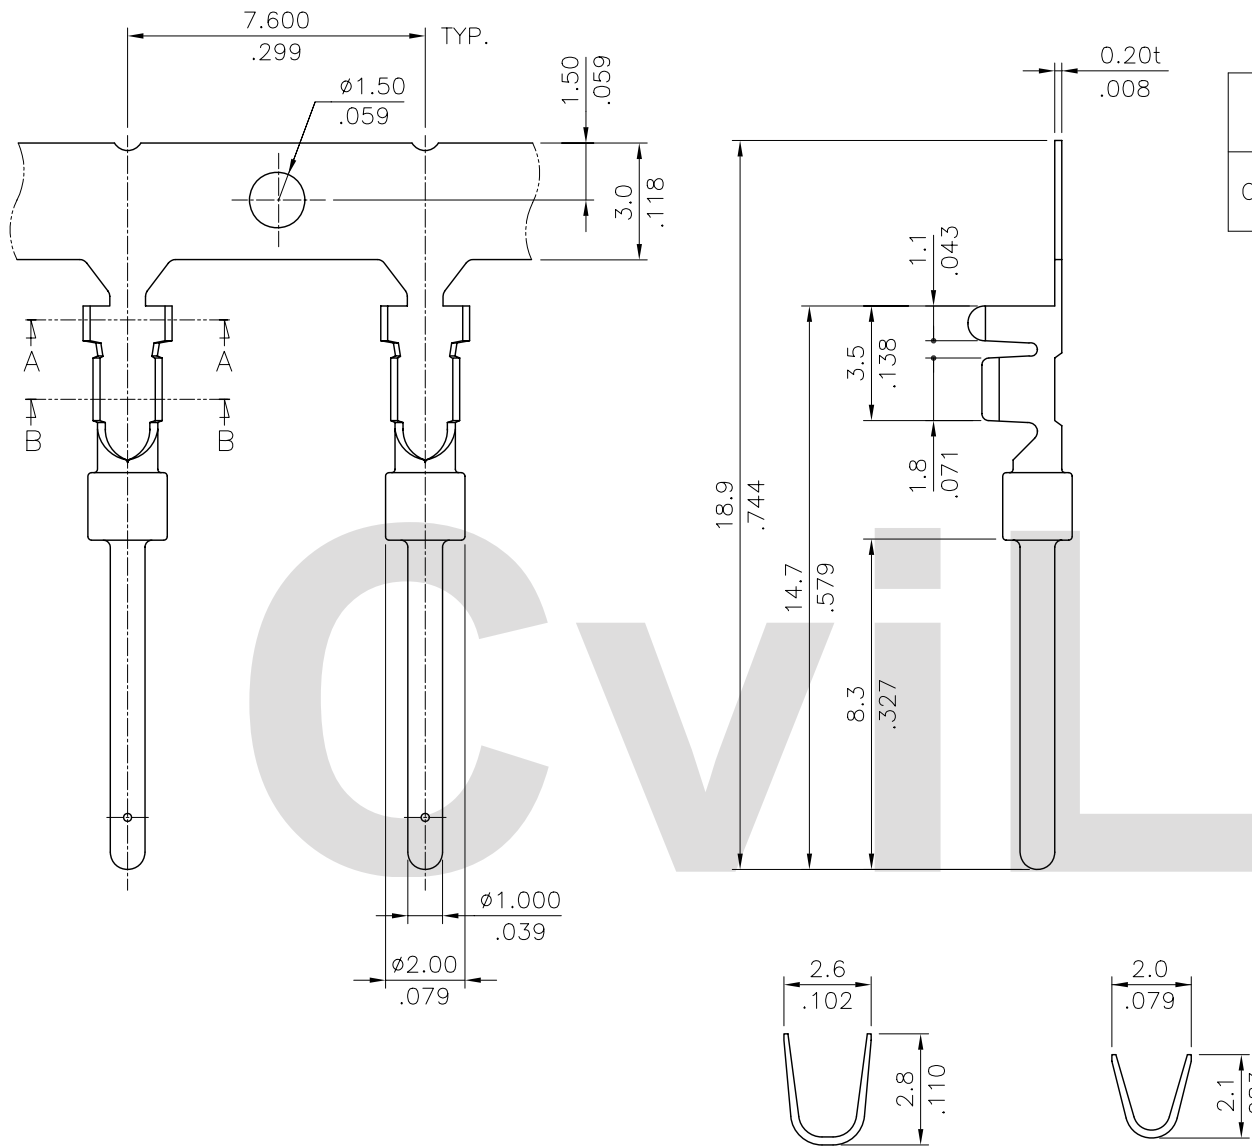

Port No.	Wire Range	Insulation Diameter	Reel Q'ty
CD52T02*BPP	AWG #22~#24	1.60 (.063) MAX.	10,000 PCS.

Ordering Code:

$\frac{CD52}{①}$
 $\frac{T}{②}$
 $\frac{02}{③}$
 $\frac{*}{④}$
 $\frac{B}{⑤}$
 $\frac{P}{⑥}$
 $\frac{P}{⑦}$

① Series No.

② T= Terminal

③ Crimping style:

02= 01 for AWG # 22~ AWG #24

④ Plating option:

2= Gold flash plated over Nickel

A= Selective Gold flash plated over 1.27μm(50μ") Nickel

B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel

C= Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel

⑤ Material: B= Brass

⑥ Plating method: P= Post plating

⑦ Crimping terminal: P= Male

SEC.:A-A

SEC.:B-B

RoHS Compliant

4				CIVILUX CORP. 2007.12.04 ISSUED			DATE	UNIT: mm / inch		TITLE: CRIMP TERMINAL	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY:	Sun	12/03-07'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2	Sun	12/03-07	ECR07151-3/ECN07466		ENGINEER:	Eisley	12/03-07'	.X ± 0.20/.008	X* ± 1"	MATERIAL:				
1	Jessie	9/25/03'	ECN03317		CHECKED BY:	David	12/03-07'	.XX ± 0.10/.004	.X* ±					
SYM	NAME	DATE	REVISIONS		APPROVED BY:	David	12/03-07'	.XXX ± 0.05/.002	.XX* ±	FINISH:				
DRAWING NO.			CD5203SE	PART NO.			CD52T02*BPP							
SCALE			5 / 1		SHEET			1 OF 1						