


Material:

Insulator: Glass filled Polyester UL 94V-0

Color Black or White

Contact: Brass

Shell: Steel, Tin plated as standard

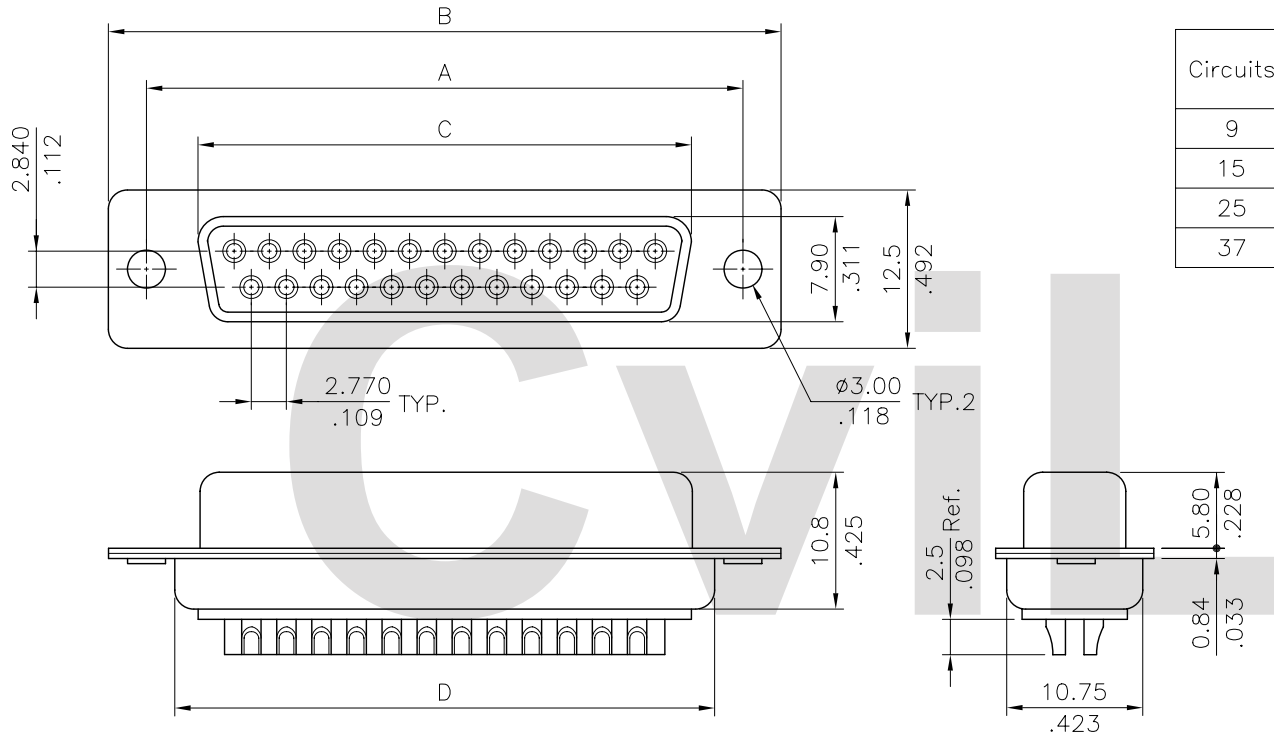

Circuits	Dimension			
	A	B	C	D
9	25.00(.984)	30.8(1.213)	16.30(.642)	19.2(.756)
15	33.32(1.312)	39.2(1.543)	24.60(.969)	27.6(1.087)
25	47.04(1.852)	53.1(2.091)	38.30(1.508)	41.1(1.618)
37	63.50(2.500)	69.4(2.732)	54.80(2.157)	57.3(2.256)

Ordering Code :

CD71 25 S * * 00
① ② ③ ④ ⑤ ⑥

- Series No.
- Contacts: 9,15,25,37
- Contact type : P=Plug , S=Receptacle
- Contact Plating :
 - 2 = Gold flash plated over 1.27 μ m(50 μ " Nickel (Standard)
 - 3 = 0.38 μ m(15 μ " Gold plated over 1.27 μ m(50 μ " Nickel
 - 4 = 0.76 μ m(30 μ " Gold plated over 1.27 μ m(50 μ " Nickel
 - 5 = 1.27 μ m(50 μ " Gold plated over 1.27 μ m(50 μ " Nickel
- Insulator Color :
1=Black , 0=White
- Other option :
00 = With ϕ 3.00mm holes on shell

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: D-SUB SOLDER CUP MALE CONNECTOR (MACHINED CONTACT)	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: David	2/15 00'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2					ENGINEER: David	2/15 00'	.X $\pm$ 0.30/.012 X' $\pm$ 1"	DRAWING NO. CD7102SB PART NO. CD71**S**00			
1					CHECKED BY: Alex	2/15 00'	.XX $\pm$ 0.20/.008 X" $\pm$				
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	2/15 00'	.XXX $\pm$ 0.10/.004 .XX" $\pm$	FINISH:	SCALE	2 / 1	SHEET	1 OF 1