
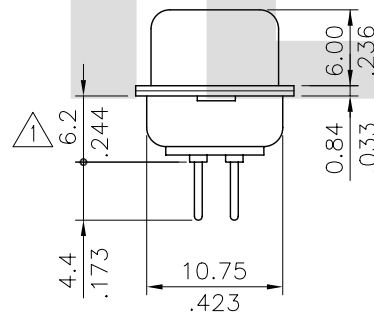
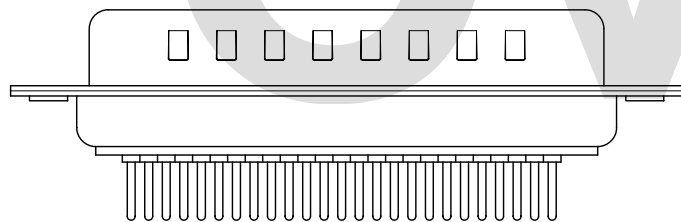


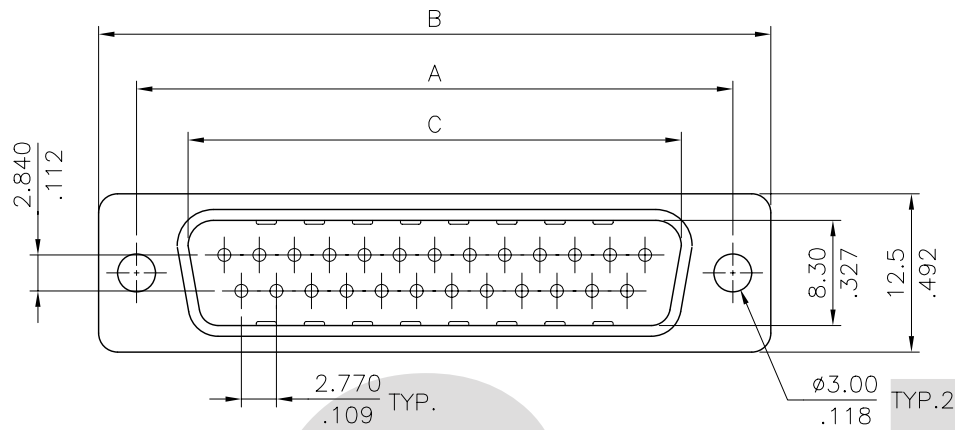

Material:

Insulator: Glass filled Polyester UL 94V-0
Color Black or White

Contact: Brass

Shell: Steel, Tin plated as standard

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.92(.666)
15	33.32(1.312)	39.2(1.543)	25.25(.994)
25	47.04(1.852)	53.1(2.091)	38.96(1.534)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)

Ordering Code :

CD72 25 P * * 00
① ② ③ ④ ⑤ ⑥

- Series No.
- Contacts: 9,15,25,37
- Contact type : P=plug , S=Receptacle
- Contact Plating :
 - 2 = Gold flash plated over 1.27μm(50μ") Nickel (Standard)
 - 3 = 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 - 4 = 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
 - 5 = 1.27μm(50μ") Gold plated over 1.27μm(50μ") Nickel
- Insulator Color :
 - 1=Black , 0=White
- Other option :
 - 00 = With 3.00mm holes on shell

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: D-SUB TOP ENTRY MALE CONNECTOR (MACHINED CONTACTOR)	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: Sun	12/4 03'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2					ENGINEER: Eisley	12/4 03'	.X ±0.30/.012 X' ± 1'	DRAWING NO. CD7201SD PART NO. CD72**P**00			
1	SUN	12/03/03'	ECN03437/ECR03056-0		CHECKED BY: David	12/4 03'	.XX ±0.20/.008 X' ±				
SYM	NAME	DATE	REVISIONS		APPROVED BY: David	12/4 03'	.XXX ±0.10/.004 X' ±	FINISH:	SCALE	2 / 1	SHEET 1 OF 1

