


Material:

Insulator: Glass filled Polyester UL 94V-0
Color Black or White

Contact: Brass

Shell: Steel, Tin plated as standard

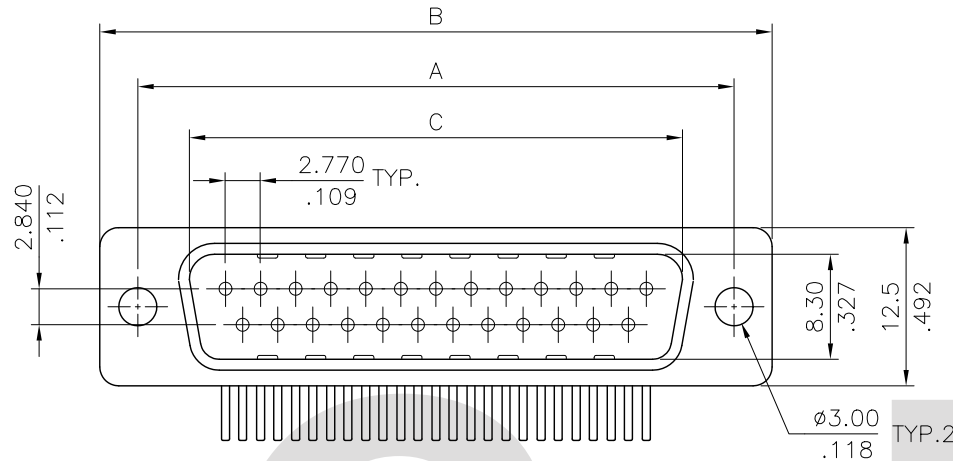

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.92(.666)
15	33.32(1.312)	39.2(1.543)	25.25(.994)
25	47.04(1.852)	53.1(2.091)	38.96(1.534)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)

Ordering Code :

CD73 25 P * * 00

① ② ③ ④ ⑤ ⑥

1. Series No.
2. Contacts: 9,15,25,37
3. Contact type : P=Plug , S=Receptacle
4. Contact Plating :

2 = Gold flash plated over 1.27μm(50μ") Nickel



3 = 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel

4 = 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel

5 = 1.27μm(50μ") Gold plated over 1.27μm(50μ") Nickel

5. Insulator Color :
1=Black , 0=White

6. Other option :
00 = With Ø3.00mm holes on shell

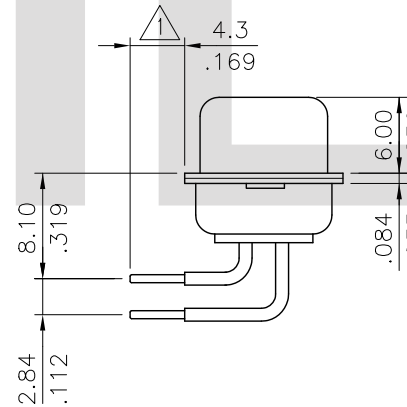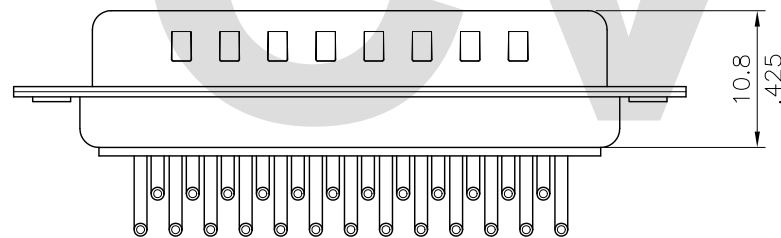

Lead Free Process

RoHS compliant

4				CIVILUX CORP 2011.10.13 ISSUED			DATE	UNIT: mm / inch		TITLE: D-SUB SIDE ENTRY (8.1mm) MALE CONNECTOR (MACHINED CONTACTOR)	 瀚荃股份有限公司 CviLux Corporation		
3					DRAWN BY:	Karen	10/7-11'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2					ENGINEER:	Eisley	10/11-11'	.X ±0.30/.012	X' ± 1"	MATERIAL:			
1	Karen	10/04-11'	ECN11215/ECR11080-0		CHECKED BY:	Eisley	10/11-11'	.XX ±0.20/.008	.X' ±			FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	10/11-11'	.XXX ±0.10/.004	.XX' ±		DRAWING NO.	CD7301SE		PART NO.
										SCALE	2 / 1	SHEET	1 OF 1