


Material:

Insulator: Glass filled Polyester UL 94V-0

Color Black or White

Contact: Brass

Shell: Steel, Tin plated as standard

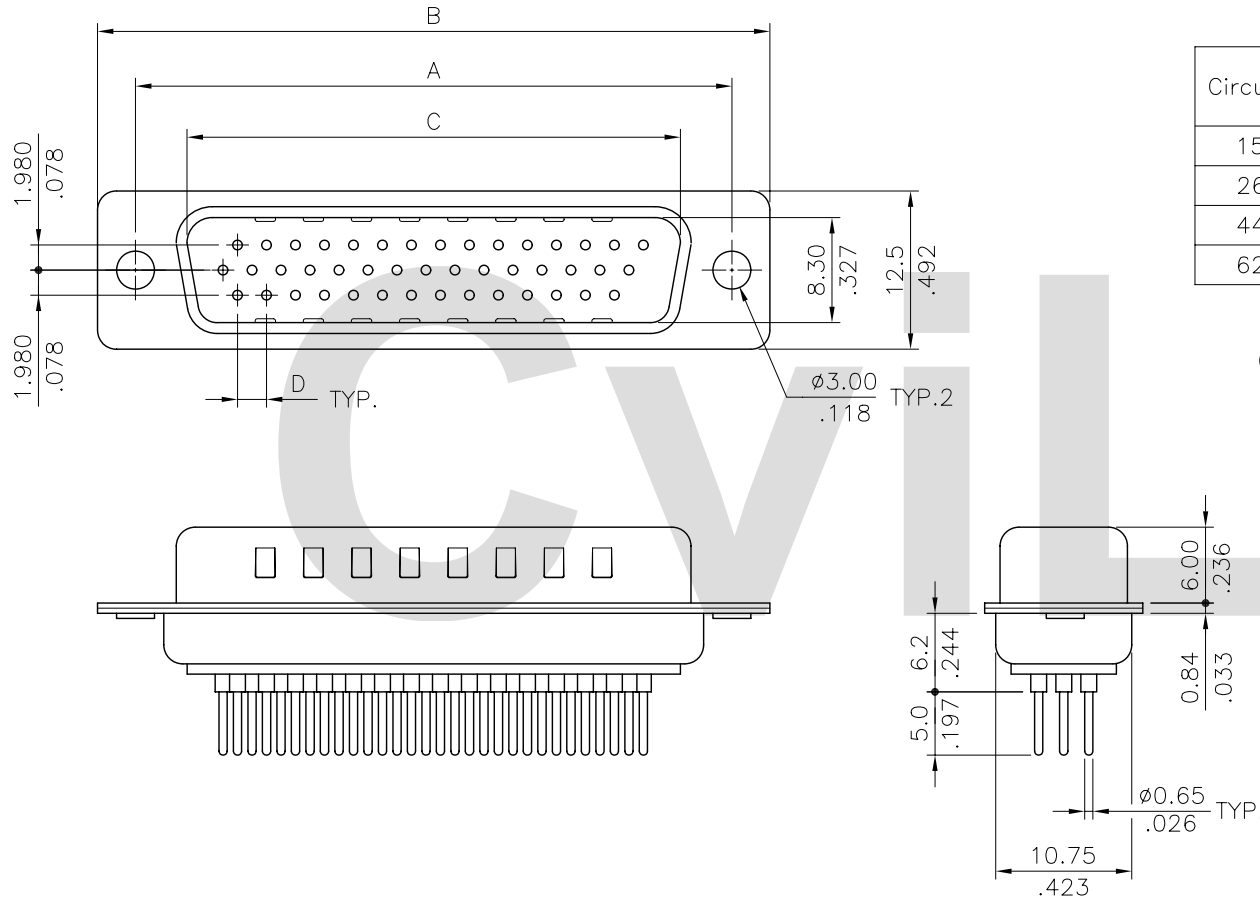

Circuits	Dimension			
	A	B	C	D
15	25.00(.984)	30.8(1.213)	16.92(.666)	2.290(.090)
26	33.32(1.312)	39.2(1.543)	25.25(.994)	2.290(.090)
44	47.04(1.852)	53.1(2.091)	38.96(1.534)	2.290(.090)
62	63.50(2.500)	69.4(2.732)	55.42(2.182)	2.410(.095)

Ordering Code :

CD76 44 P * * 00
 ① ② ③ ④ ⑤ ⑥

- Series No.
- Contacts: 15,26,44,62
- Contact type : P=plug , S=Receptacle
- Contact Plating :
 - 2 = Gold flash plated over 1.27μm(50μ") Nickel
 - 3 = 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 - 4 = 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
 - 5 = 1.27μm(50μ") Gold plated over 1.27μm(50μ") Nickel
- Insulator Color :
 - 1=Black , 0=White
- Other option :
 - 00 = With ø3.00mm holes on shell

4				Civilux Corp 2000.08.31 ISSUED		DATE	UNIT: mm / inch		TITLE: HIGH-DENSITY D-SUB TOP ENTRY MALE CONNECTOR (MACHINED CONTACT)	 瀚荃股份有限公司 CviLux Corporation				
3					DRAWN BY:	David	8/31 00'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2					ENGINEER:	David	8/31 00'	.X ±0.30/.012	.X' ± 1'		MATERIAL:			
1					CHECKED BY:	Alex	8/31 00'					.XX ±0.20/.008	.X' ±	
SYM	NAME	DATE	REVISIONS		APPROVED BY:	Alex	8/31 00'	.XXX ±0.10/.004	.XX' ±	FINISH:	DRAWING NO.	CD7601SA	PART NO.	CD76**P**00
											SCALE	2 / 1	SHEET	1 OF 1

