


Material:

Insulator: Glass filled Polyester UL 94V-0

Color Black or White

Contact: Brass

Shell: Steel, Tin plated as standard

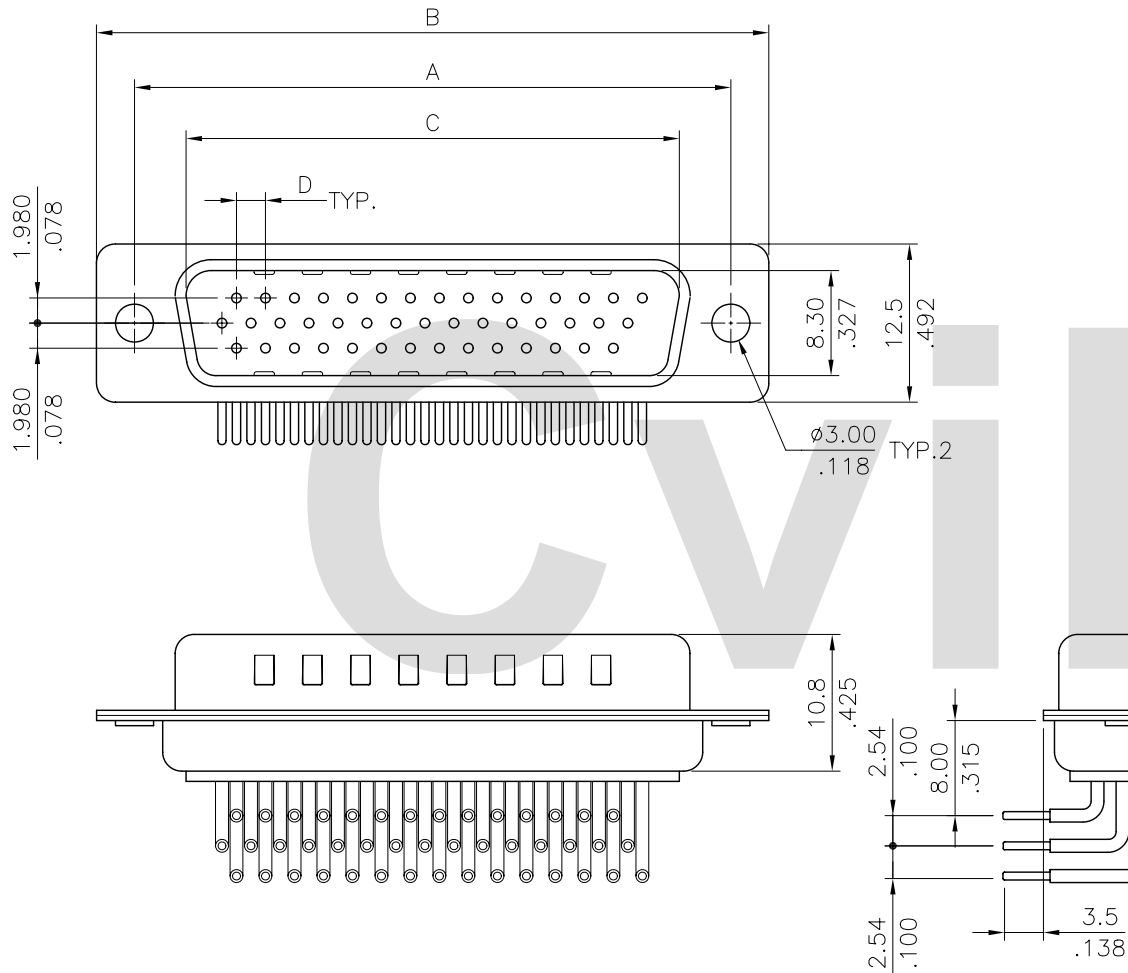

Circuits	Dimension			
	A	B	C	D
15	25.00(.984)	30.8(1.213)	16.92(.666)	2.290(.090)
26	33.32(1.312)	39.2(1.543)	25.25(.994)	2.290(.090)
44	47.04(1.852)	53.1(2.091)	38.96(1.534)	2.290(.090)
62	63.50(2.500)	69.4(2.732)	55.42(2.182)	2.410(.095)

Ordering Code :

CD77 44 P * * 00
① ② ③ ④ ⑤ ⑥

1. Series No.
2. Contacts: 15,26,44,62
3. Contact type : P=plug , S=Receptacle
4. Contact Plating :
2 = Gold flash plated over 1.27 μ m(50 μ ”) Nickel
3 = 0.38 μ m(15 μ ”) Gold plated over 1.27 μ m(50 μ ”) Nickel
4 = 0.76 μ m(30 μ ”) Gold plated over 1.27 μ m(50 μ ”) Nickel
5 = 1.27 μ m(50 μ ”) Gold plated over 1.27 μ m(50 μ ”) Nickel
5. Insulator Color :
1=Black , 0=White
6. Other option :
00 = With $\varnothing$ 3.00mm holes on shell

4					DATE	UNIT: mm / inch	TITLE: HIGH DENSITY D-SUB SOLDER PIN RIGHT ANGLE MALE CONNECTOR (MACHINED CONTACT)		 瀚荃股份有限公司 CviLux Corporation			
3												
2					DRAWN BY: David	8/31 00'	TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWING NO. CD7701SA PART NO. CD77**P**00			
1					ENGINEER: David	8/31 00'						
					CHECKED BY: Alex	8/31 00'	.X $\pm$ 0.30/.012	X' $\pm$ 1"	MATERIAL:			
					APPROVED BY: Alex	8/31 00'	.XX $\pm$ 0.20/.008	X" $\pm$				
							.XXX $\pm$ 0.10/.004	.XX' $\pm$	FINISH:			
SYM	NAME	DATE	REVISIONS						SCALE	2 / 1	SHEET	1 OF 1